


- 
- 1** The highest quality slats from the best European supplier – Hoesch. They are equipped with a patented mechanism protecting against crushing fingers.
 - 2** Two durable tracks made of 1,5 mm thick steel.
 - 3** A Somfy motor enables its comfortable use. As the only manufacturer we provide two remote controls enclosed in all standard versions. Additionally, they can be upgraded to motors with a geolocation door opening option.
 - 4** Simplified installation – fewer parts and preassembled elements. One person is enough to install a garage door.
 - 5** The philosophy of two spanners – there are only two spanners needed to install the whole garage door (10 and 13).
 - 6** A possibility to incorporate glass panels and any Inox design at a customer's special request.
 - 7** An engine is equipped with an obstacle detection option and a four-step adjustment of the compression strength. After detecting any obstacle for instance a car entering the garage, the garage door will stop thereby causing no damage.
 - 8** Extremely silent operation that is guaranteed by the high quality silent rubber rollers.
 - 9** A user's safety is upgraded by the so-called spring-in-spring mechanism that we applied.
 - 10** Garage doors in the standard versions are available in three colours: white, anthracite and silver. You may also choose between smooth and milled panels.
 - 11** At a customer's special request we varnish and veneer the garage doors to match other doors and windows. This applies to smooth panels only.
 - 12** Hinges with the upgraded durability.
 - 13** Structure stability as well as precise and easy installation is possible due to a rear beam that we offer in our standard versions as one of few manufacturers.
 - 14** Durability of our springs go up to 25 000 cycles that ensures a garage door longevity of 10 years.
 - 15** In our offer you will find two solutions with torsion or tension springs.
 - 16** Tightness of a garage door is guaranteed by thermal seals in frontal beams as well as a bottom seal with three support points.

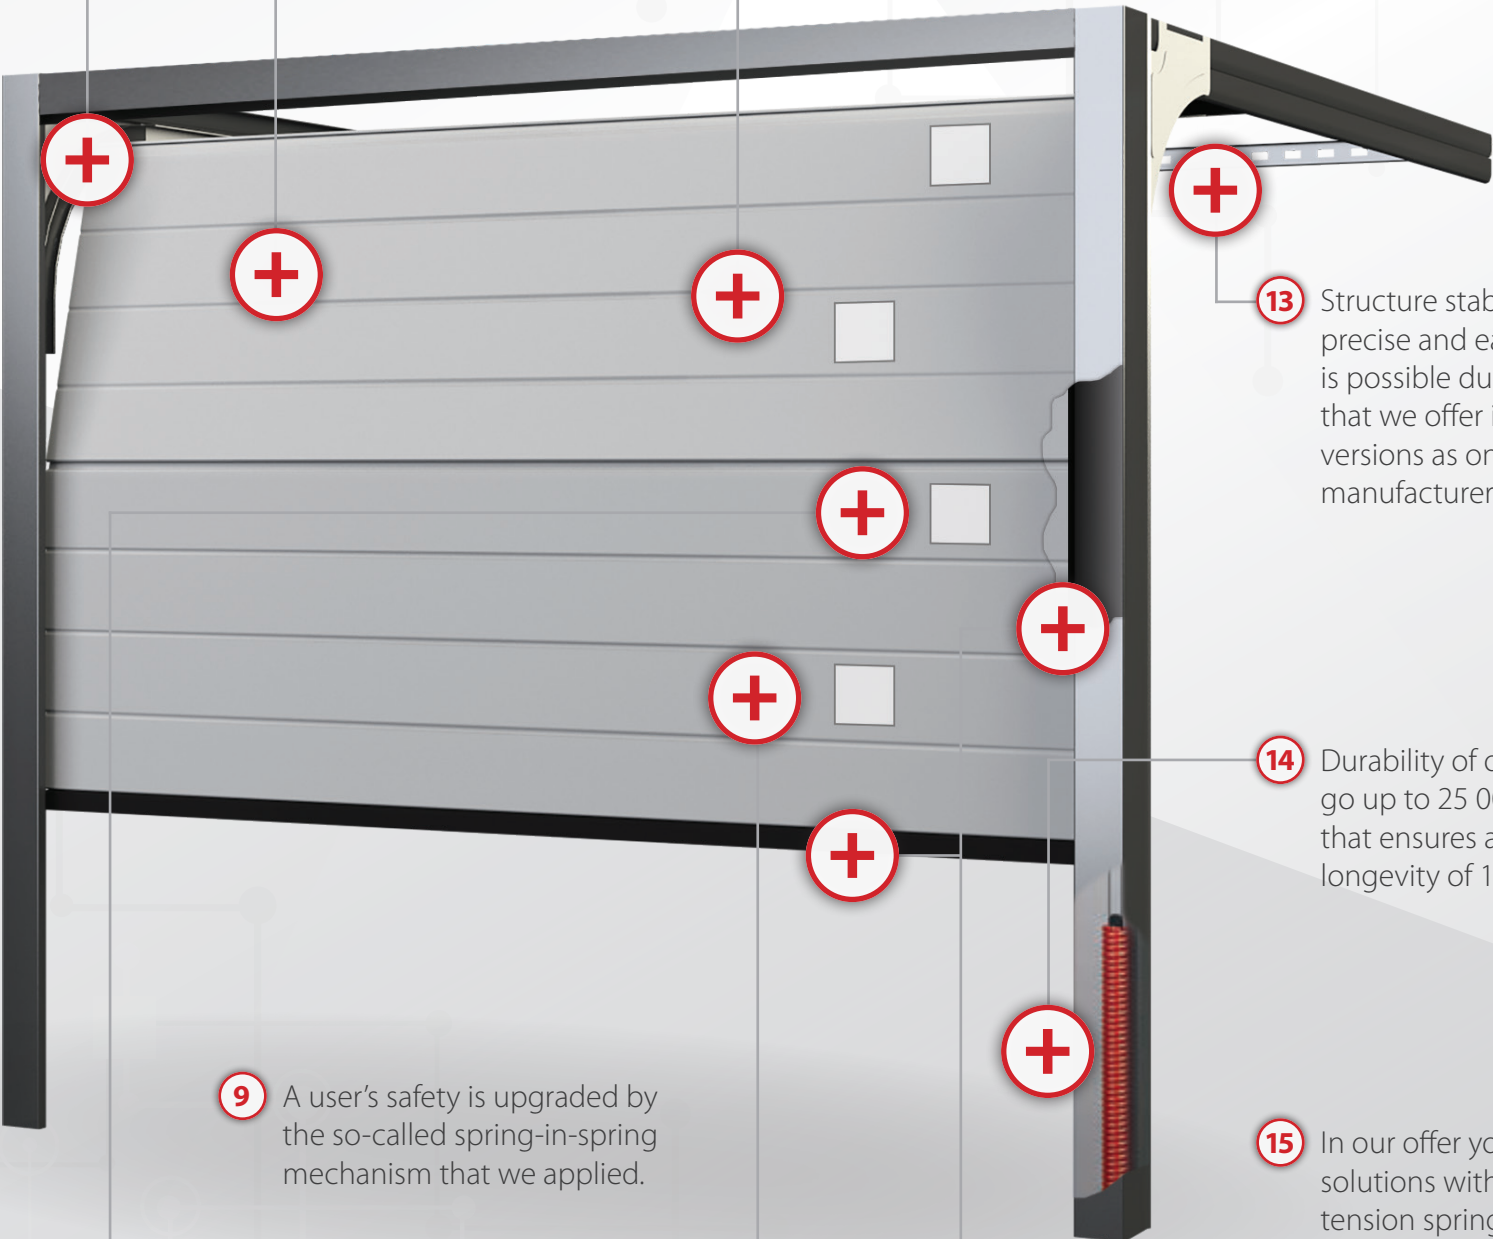